


## HYDROSTATIC TEST PUMPS

# Model DE-3C • 6 GPM • 450 PSI

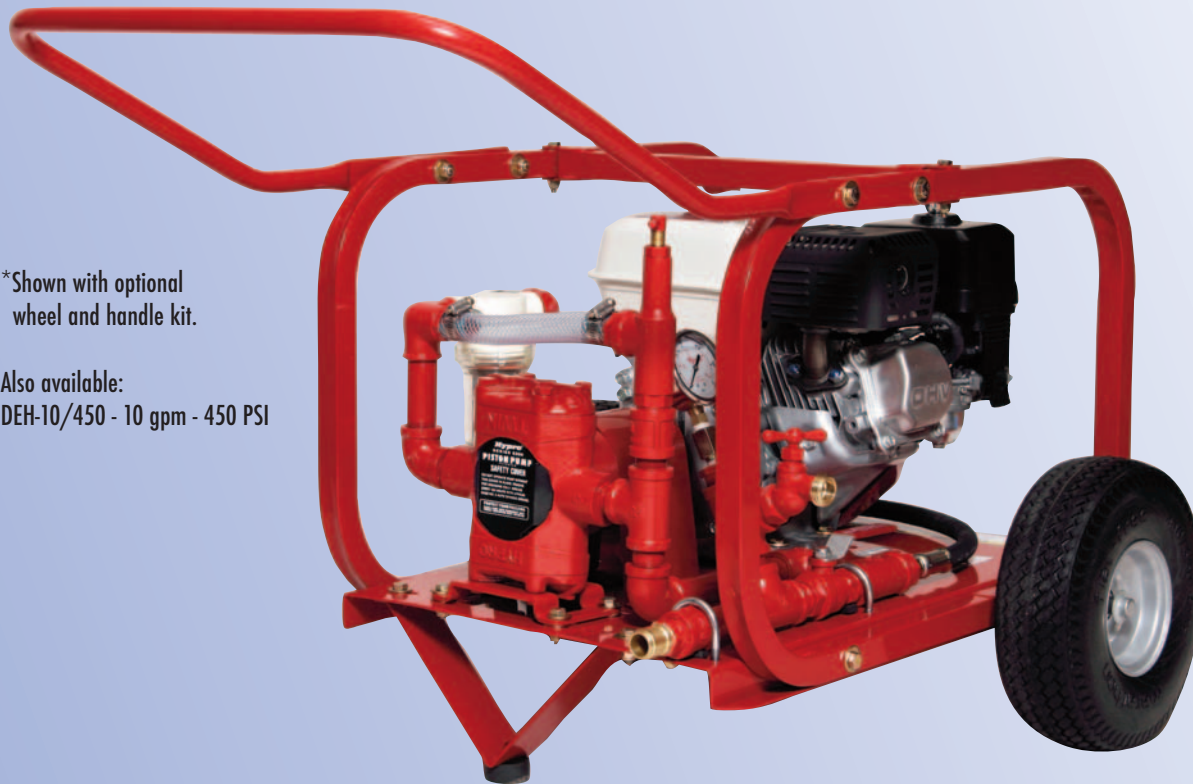

\*Shown with optional wheel and handle kit.

Also available:  
DEH-10/450 - 10 gpm - 450 PSI

The DE-3C is a mid volume, medium pressure hydrostatic pump. Designed for testing lines up to 16 inches in diameter. This unit is dependable and simple to run. The pulsation damper hose and liquid-filled stainless steel gauge reduce liability and maintenance costs, while providing the user with precise and accurate readings. The positive displacement twin piston pump, is

manufactured with a cast iron housing and cylinder head, and utilizes stainless steel valves. A pressure regulator with inlet bypass, allows exact setting of test pressure, conserves water, and reduces wear. This unit is available with a Briggs & Stratton or Honda engine option.

- **Automatic Pressure Regulator with Inlet Bypass**
- **Stainless Steel Liquid-Filled Gauge Ensures Accurate Readings, with Less Flutter**
- **Built-in High Pressure Ballvalve & Fittings**
- **In-Line Strainer with Stainless Steel Mesh Filter and Clear Bowl**

## S P E C I F I C A T I O N S

- **INLET:** 3/4" female hose swivel
- **OUTLET:** 3/4" with Quick Connect Couplings  
High pressure 8 ft. hose  
Pressure regulator adjusting to 450 PSI
- **PUMP:** Twin pistons, positive displacement cast iron housing and cylinder head, stainless steel utilized valves
- **OUTPUT FLOW:** 6 GPM
- **MAX. OUTPUT PRESSURE:** 450 PSI
- **ENGINE:** 160 cc, air-cooled, 4-cycle, Briggs or Honda engine option available
- **SHIPPING DIMENSIONS:** 27" x 22" x 19"
- **SHIPPING WEIGHT:** 107# with pallet 120#